

**LM3S1000 Series Block Diagram.** This block diagram shows the superset of features for the LM3S1000 series of microcontrollers.


## Product Features

- ARM® Cortex™-M3 Processor Core
  - 80-MHz operation; 100 DMIPS performance
  - ARM Cortex SysTick Timer
  - Nested Vectored Interrupt Controller (NVIC)
- On-Chip Memory
  - 64 KB single-cycle Flash memory up to 50 MHz; a prefetch buffer improves performance above 50 MHz
  - 24 KB single-cycle SRAM
  - Internal ROM loaded with StellarisWare® software:
    - Stellaris® Peripheral Driver Library
    - Stellaris® Boot Loader
- Advanced Serial Integration
  - Three UARTs with IrDA and ISO 7816 support (one UART with full modem controls)
  - Two I<sup>2</sup>C modules
  - Two Synchronous Serial Interface modules (SSI)
  - Integrated Interchip Sound (I<sup>2</sup>S) module
- System Integration
  - Direct Memory Access Controller (DMA)
  - System control and clocks including on-chip precision 16-MHz oscillator
  - Four 32-bit timers (up to eight 16-bit)
  - Eight Capture Compare PWM pins (CCP)

- Lower-power battery-backed hibernation module
- Real-Time Clock
- Two Watchdog Timers
  - One timer runs off the main oscillator
  - One timer runs off the precision internal oscillator
- Up to 67 GPIOs, depending on configuration
  - Highly flexible pin muxing allows use as GPIO or one of several peripheral functions
  - Independently configurable to 2, 4 or 8 mA drive capability
  - Up to 4 GPIOs can have 18 mA drive capability
- Advanced Motion Control
  - Six advanced PWM outputs for motion and energy applications
  - Four fault inputs to promote low-latency shutdown
  - Two Quadrature Encoder Inputs (QEI)
- Analog
  - Two 10-bit Analog-to-Digital Converters (ADC) with sixteen analog input channels and sample rate of one million samples/second
  - Two analog comparators
  - 16 digital comparators
  - On-chip voltage regulator
- JTAG and ARM Serial Wire Debug (SWD)
- 100-pin LQFP and 108-ball BGA package
- Industrial (-40°C to 85°C) Temperature Range

## Target Applications

- Motion control
- Factory automation
- Fire and security
- HVAC and building control
- Test and measurement equipment
- Remote monitoring
- Electronic point-of-sale (POS) machines
- Network appliances and switches
- Gaming equipment

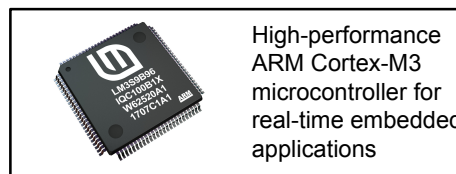




## Ordering Information

Orderable Part Number	Description
LM3S1P51-IQC80-C1	Stellaris® LM3S1P51 Microcontroller Industrial Temperature 100-pin LQFP
LM3S1P51-IBZ80-C1	Stellaris® LM3S1P51 Microcontroller Industrial Temperature 108-ball BGA
LM3S1P51-IQC80-C1T	Stellaris® LM3S1P51 Microcontroller Industrial Temperature 100-pin LQFP Tape-and-reel
LM3S1P51-IBZ80-C1T	Stellaris® LM3S1P51 Microcontroller Industrial Temperature 108-ball BGA Tape-and-reel

## Development Kit

The Stellaris® LM3S9B96 Development Kit provides the hardware and software tools that engineers need to begin development quickly. Ask your distributor for part number DK-LM3S9B96. See the website for the latest tools available.

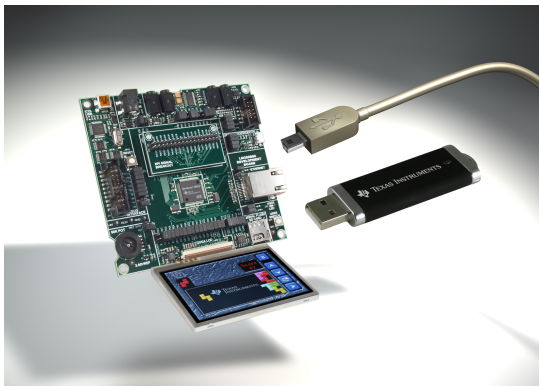

## Evaluation Kit

The Stellaris® LM3S9B90 and LM3S9B92 Ethernet and USB-OTG Evaluation Kits provide the hardware and software tools to speed development using the LM3S9B90 and LM3S9B92 microcontrollers' integrated USB Full-Speed OTG port and 10/100 Ethernet controllers. Ask your distributor for part number EKK-LM3S9B90 or EKK-LM3S9B92 (ARM RealView® MDK tools), EKI-LM3S9B90 or EKI-LM3S9B92 (IAR Embedded Workbench® tools), EKC-LM3S9B90 or EKC-LM3S9B92 (CodeSourcery Sourcery G++ tools), EKT-LM3S9B90 or EKT-LM3S9B92 (Code Red Technologies Red Suite tools), or EKS-LM3S9B90 or EKS-LM3S9B92 (Texas Instruments' Code Composer Studio™ IDE). See the website for the latest tools available.

